


EB TIP HOLDERS

Tip Holder Options


Each Everbeing tip holders will enhance your probing experience. Choose based on the conditions of your testing requirements. All of them are compatible to our EB-700, EB-050 and EB-005. If you have third-party brands of micropositioners, please let us know and we can customize adapters for you. If your application does not apply to any of the following, please contact us directly.

*The following leakage data is based on a ± 5 V sweep in medium mode

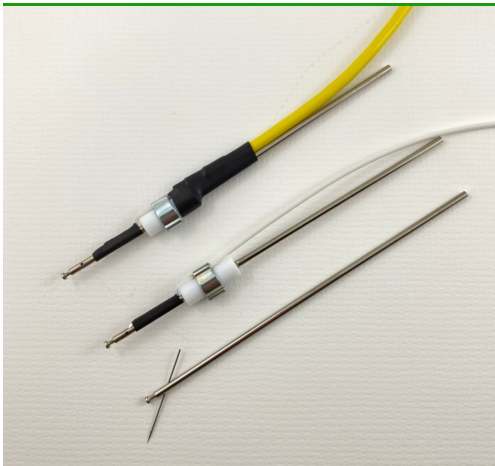


Screw Type Tip Holder

	TH-SC-B	TH-SC-C	TH-SC-T
Voltage:	1000 V	500 V	1800 V
Current:	5 A	2 A	1 A
Leakage:	10 nA	10 pA	1 pA
Frequency:	2 MHz	2 MHz	1 MHz

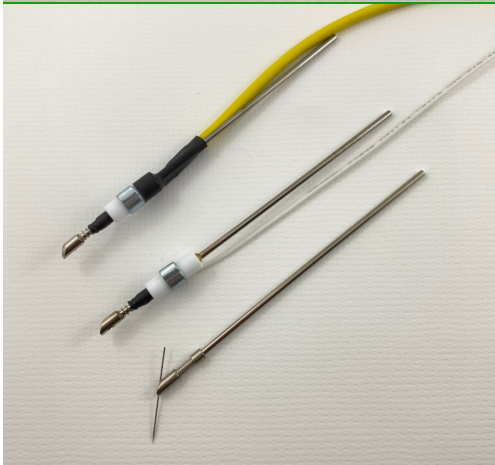

Spring Type Tip Holder

	TH-SP-B	TH-SP-C	TH-SP-T
Voltage:	1000 V	500 V	1800 V
Current:	5 A	2 A	1 A
Leakage:	500 nA	10 pA	1 pA
Frequency:	2 MHz	2 MHz	1 MHz

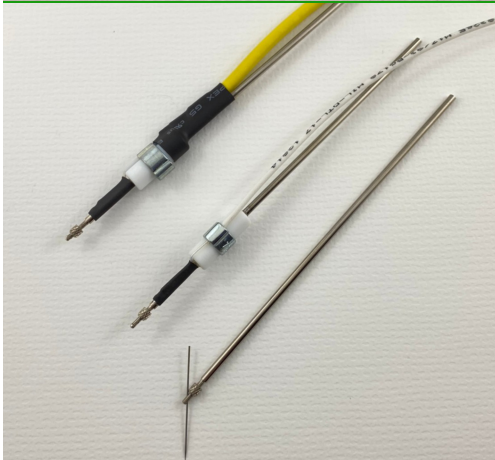


Screw Nut Type Tip Holder

	TH-SN-B	TH-SN-C	TH-SN-T
Voltage:	1000 V	500 V	1800 V
Current:	5 A	2 A	1 A
Leakage:	10 nA	10 pA	1 pA
Frequency:	2 MHz	2 MHz	1 MHz


EB TIP HOLDERS

Tip Holder Options (cont'd)

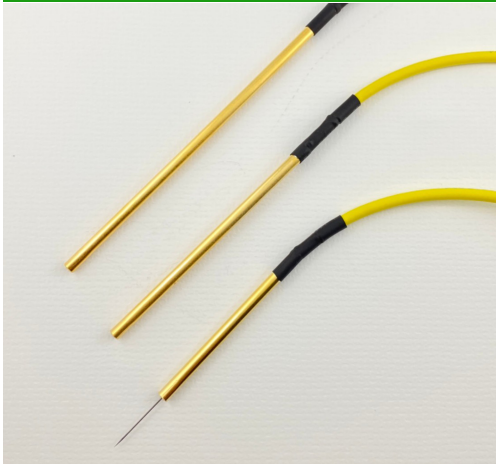

Tubular Type Tip Holder

	TH-TU-C	TH-SC-T
Voltage:	500 V	1800 V
Current:	2 A	1 A
Leakage:	500 fA	80 fA
Frequency:	1 MHz	1 MHz

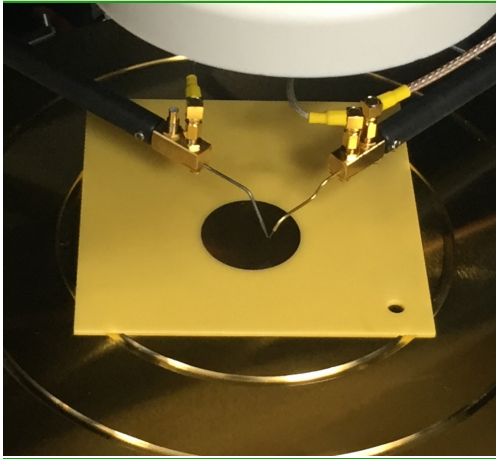

Quasi-Kelvin Tip Holder

Voltage:	500 V
Current:	2 A
Leakage:	10 fA
Frequency:	150 MHz

Additional Tip Holder Options

Applications relating to high current or high voltage are custom made. Send us an e-mail at sales@probestation.tw for further assistance.